



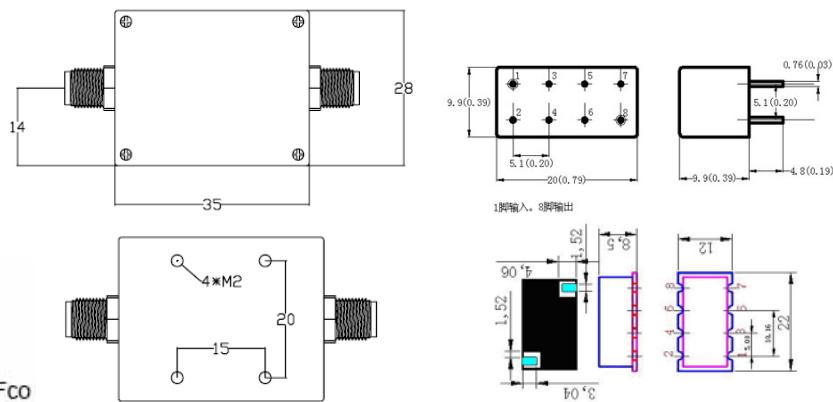

中心频率
150 ~ 699MHz

高通滤波器
切比雪夫
8阶

OHP系列
SMA/N 连接器

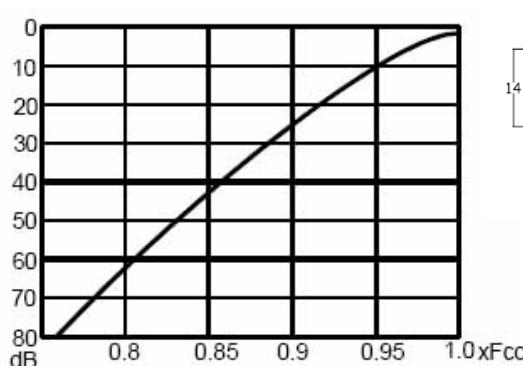

型号	通频带 MHz	最大插损			抑制衰减	
		at Fco	at 1.03 x Fco	at 1.1 x Fco	40 dB min. at 0.52 x Fco	60 dB min. from DC to 0.39 x Fco
OHP 150-8	150 to 1000	0.35 dB	0.32 dB	0.31 dB	78 MHz	DC to 58.5 MHz
OHP 160-8	160 to 1000	0.35 dB	0.32 dB	0.31 dB	83.2 MHz	DC to 62.4 MHz
OHP 170-8	170 to 1000	0.35 dB	0.32 dB	0.31 dB	88.4 MHz	DC to 66.3 MHz
OHP 185-8	185 to 1000	0.31 dB	0.30 dB	0.29 dB	96.2 MHz	DC to 72.2 MHz
OHP 200-8	200 to 1000	0.31 dB	0.30 dB	0.29 dB	104 MHz	DC to 78 MHz
OHP 215-8	215 to 1000	0.31 dB	0.30 dB	0.29 dB	112 MHz	DC to 83.9 MHz
OHP 230-8	230 to 1000	0.31 dB	0.30 dB	0.29 dB	120 MHz	DC to 89.7 MHz
OHP 245-8	245 to 1000	0.31 dB	0.30 dB	0.29 dB	127 MHz	DC to 95.6 MHz
OHP 260-8	260 to 1000	0.31 dB	0.30 dB	0.29 dB	135 MHz	DC to 101 MHz
OHP 275-8	275 to 1000	0.31 dB	0.30 dB	0.29 dB	143 MHz	DC to 107 MHz
OHP 300-8	300 to 1000	0.31 dB	0.30 dB	0.29 dB	156 MHz	DC to 117 MHz
OHP 325-8	325 to 1000	0.31 dB	0.30 dB	0.29 dB	169 MHz	DC to 127 MHz
OHP 350-8	350 to 1000	0.31 dB	0.30 dB	0.29 dB	182 MHz	DC to 137 MHz
OHP 375-8	375 to 1000	0.31 dB	0.30 dB	0.29 dB	195 MHz	DC to 146 MHz
OHP 400-8	400 to 1000	0.31 dB	0.30 dB	0.29 dB	208 MHz	DC to 156 MHz
OHP 425-8	425 to 1000	0.31 dB	0.30 dB	0.29 dB	221 MHz	DC to 166 MHz
OHP 450-8	450 to 1000	0.31 dB	0.30 dB	0.29 dB	234 MHz	DC to 176 MHz
OHP 500-8	500 to 1000	0.34 dB	0.32 dB	0.31 dB	260 MHz	DC to 195 MHz
OHP 550-8	550 to 1000	0.34 dB	0.32 dB	0.31 dB	286 MHz	DC to 215 MHz
OHP 600-8	600 to 2000	0.34 dB	0.32 dB	0.31 dB	312 MHz	DC to 234 MHz
OHP 650-8	650 to 2000	0.34 dB	0.32 dB	0.31 dB	338 MHz	DC to 254 MHz

中心频率
150 ~ 699MHz

高通滤波器
切比雪夫
8阶

OHP系列
SMA/N 连接器