



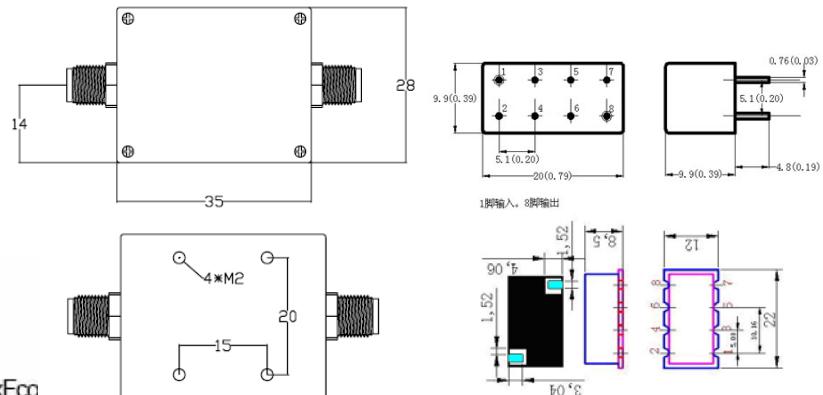

中心频率
35 ~ 149MHz

高通滤波器
切比雪夫
3阶

OHP系列
SMA/N 连接器

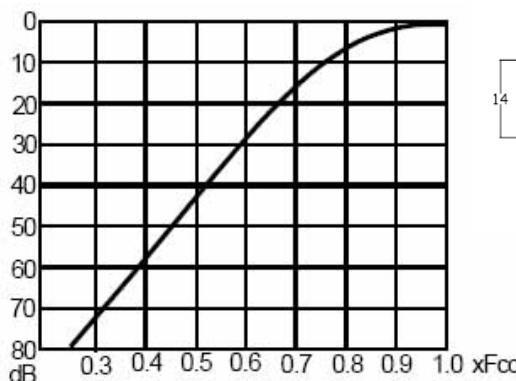

| 型号 | 通频带 MHz | 最大插损 | | | 抑制衰减 | |
|-----------|-------------|---------|---------------|--------------|-----------------------------|-------------------------------------|
| | | at Fco | at 1.03 x Fco | at 1.1 x Fco | 40 dB min. at 0.52 x Fco | 60 dB min. from DC to 0.39 x Fco |
| OHP 35-3 | 35 to 650 | 0.51 dB | 0.44 dB | 0.37 dB | 18.2 MHz | DC to 13.7 MHz |
| OHP 40-3 | 40 to 650 | 0.46 dB | 0.41 dB | 0.36 dB | 20.8 MHz | DC to 15.6 MHz |
| OHP 45-3 | 45 to 650 | 0.41 dB | 0.37 dB | 0.34 dB | 23.4 MHz | DC to 17.6 MHz |
| OHP 50-3 | 50 to 800 | 0.37 dB | 0.33 dB | 0.32 dB | 26 MHz | DC to 19.5 MHz |
| OHP 55-3 | 55 to 800 | 0.37 dB | 0.33 dB | 0.32 dB | 28.6 MHz | DC to 21.5 MHz |
| OHP 60-3 | 60 to 800 | 0.37 dB | 0.33 dB | 0.32 dB | 31.2 MHz | DC to 23.4 MHz |
| OHP 65-3 | 65 to 800 | 0.37 dB | 0.33 dB | 0.32 dB | 33.8 MHz | DC to 25.4 MHz |
| OHP 70-3 | 70 to 1000 | 0.37 dB | 0.33 dB | 0.32 dB | 36.4 MHz | DC to 27.3 MHz |
| OHP 75-3 | 75 to 1000 | 0.37 dB | 0.33 dB | 0.32 dB | 39 MHz | DC to 29.3 MHz |
| OHP 80-3 | 80 to 1000 | 0.37 dB | 0.33 dB | 0.32 dB | 41.6 MHz | DC to 31.2 MHz |
| OHP 90-3 | 90 to 1000 | 0.37 dB | 0.33 dB | 0.32 dB | 46.8 MHz | DC to 35.1 MHz |
| OHP 100-3 | 100 to 1000 | 0.35 dB | 0.32 dB | 0.31 dB | 52 MHz | DC to 39 MHz |
| OHP 110-3 | 110 to 1000 | 0.35 dB | 0.32 dB | 0.31 dB | 57.2 MHz | DC to 42.9 MHz |
| OHP 120-3 | 120 to 1000 | 0.35 dB | 0.32 dB | 0.31 dB | 62.4 MHz | DC to 46.8 MHz |
| OHP 130-3 | 130 to 1000 | 0.35 dB | 0.32 dB | 0.31 dB | 67.6 MHz | DC to 50.7 MHz |
| OHP 140-3 | 140 to 1000 | 0.35 dB | 0.32 dB | 0.31 dB | 72.8 MHz | DC to 54.6 MHz |