




中心频率
35 ~ 149MHz

高通滤波器
切比雪夫
4阶

OHP系列
SMA/N 连接器

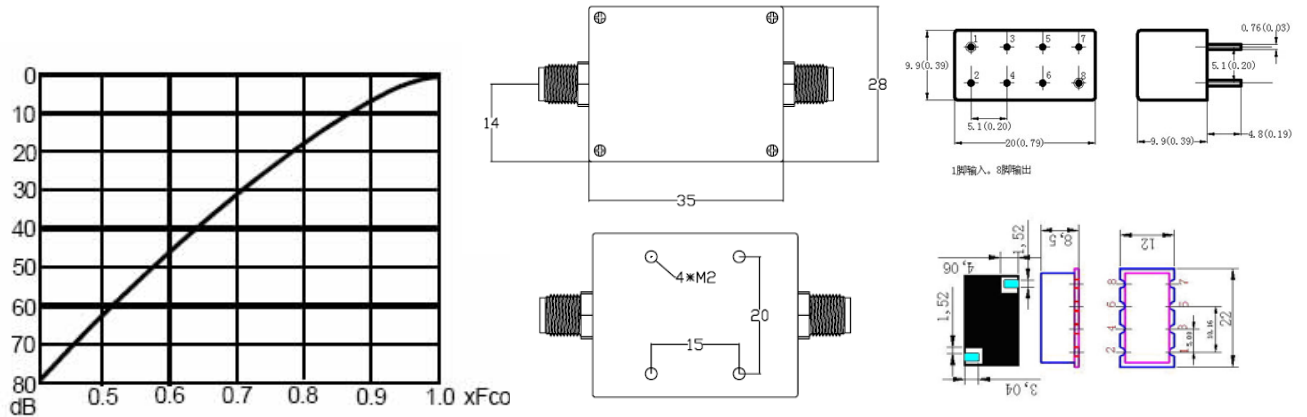

型号	通频带	最大插损			抑制衰减	
	MHz	at Fco	at 1.03 x Fco	at 1.1 x Fco	40 dB min. at 0.645 x Fco	60 dB min. from DC to 0.525 x Fco
OHP 35-4	35 to 1000	0.87 dB	0.73 dB	0.56 dB	22.6 MHz	DC to 18.4 MHz
OHP 40-4	40 to 1000	0.80 dB	0.68 dB	0.54 dB	25.8 MHz	DC to 21.0 MHz
OHP 45-4	45 to 1000	0.73 dB	0.63 dB	0.52 dB	29.0 MHz	DC to 23.6 MHz
OHP 50-4	50 to 1250	0.65 dB	0.58 dB	0.51 dB	32.3 MHz	DC to 26.3 MHz
OHP 55-4	55 to 1250	0.65 dB	0.58 dB	0.51 dB	35.5 MHz	DC to 28.9 MHz
OHP 60-4	60 to 1250	0.65 dB	0.58 dB	0.51 dB	38.7 MHz	DC to 31.5 MHz
OHP 65-4	65 to 1500	0.65 dB	0.58 dB	0.51 dB	41.9 MHz	DC to 34.1 MHz
OHP 70-4	70 to 1500	0.65 dB	0.58 dB	0.51 dB	45.2 MHz	DC to 36.8 MHz
OHP 75-4	75 to 1500	0.65 dB	0.58 dB	0.51 dB	48.4 MHz	DC to 39.4 MHz
OHP 80-4	80 to 1500	0.65 dB	0.58 dB	0.51 dB	51.6 MHz	DC to 42.0 MHz
OHP 90-4	90 to 1500	0.65 dB	0.58 dB	0.51 dB	58.1 MHz	DC to 47.3 MHz
OHP 100-4	100 to 2000	0.56 dB	0.51 dB	0.49 dB	64.5 MHz	DC to 52.5 MHz
OHP 110-4	110 to 2000	0.56 dB	0.51 dB	0.49 dB	71.0 MHz	DC to 57.8 MHz
OHP 120-4	120 to 2000	0.56 dB	0.51 dB	0.49 dB	77.4 MHz	DC to 63.0 MHz
OHP 130-4	130 to 2000	0.56 dB	0.51 dB	0.49 dB	83.9 MHz	DC to 68.3 MHz
OHP 140-4	140 to 2000	0.56 dB	0.51 dB	0.49 dB	90.3 MHz	DC to 73.5 MHz
OHP 150-4	150 to 2000	0.56 dB	0.51 dB	0.49 dB	96.8 MHz	DC to 78.8 MHz
OHP 160-4	160 to 2000	0.56 dB	0.51 dB	0.49 dB	103.0 MHz	DC to 84.0 MHz
OHP 170-4	170 to 2000	0.56 dB	0.51 dB	0.49 dB	109.0 MHz	DC to 89.3 MHz