

Power Splitter/Combiner

4 Way-0° 50Ω 2000 to 4200 MHz OPD2000-4200-4-S

Features

- wideband, 2000 to 4200 MHz
- good isolation, 25 dB typ.
- up to 10W power input as splitter

Applications

- MMDS
- wireless communication





Maximum Ratings

Operating Temperature	-40° C to 85° C
Storage Temperature	-55° C to 100° C
Power Input (as a splitter)	10W max.
Internal Dissipation	0.375W max.

Permanent damage may occur if any of these limits are exceeded.



Electrical Description			
1	Frequency	2000-4200MHz	
2	Insertion Loss Max.	0.3-1.0dB	ABOVE 6.0 dB
3	Isolation Min.	16dB	25 dB Max.
4	Phase Unbalance (Dgree) Max.	16.0	
5	Amplitude Unbalance Max. .	0.8dB	
6	VSWR Max.	1.51:1	
7	Power handing Max. (watt)	10watt	
8	Connectors	SMA/N	
9	Impedance	50 Ohm	

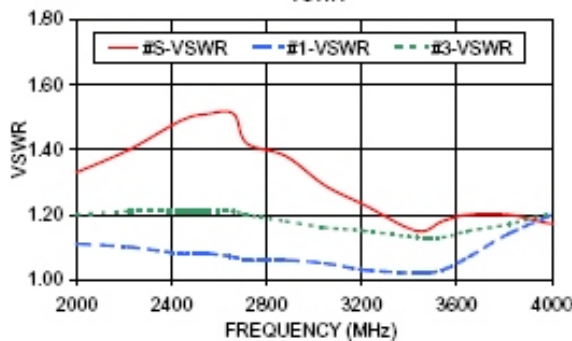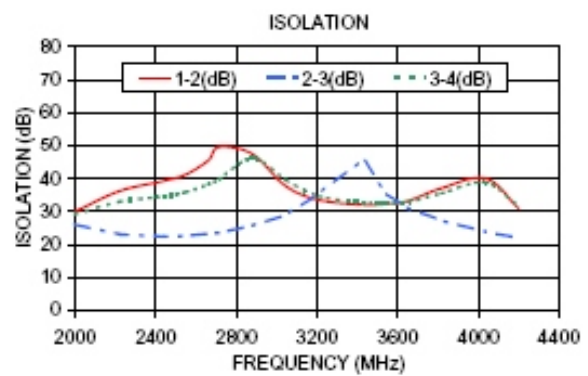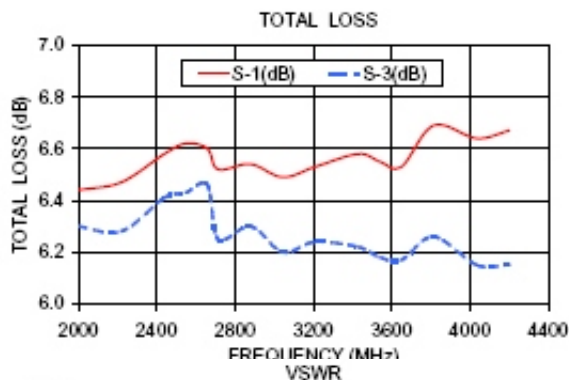

Outline Drawing



OCEANMICROWAVE

Tel: +86-10-60290088 Fax: +86-10-60290088-601

Web: <http://www.oceanmicrowave.com> Email: sales@oceanmicrowave.com