



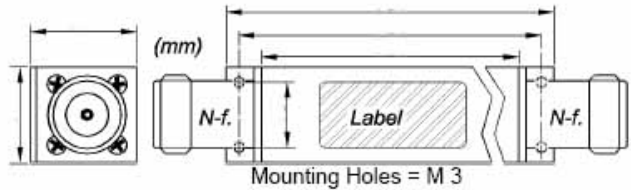

Fco between 150 and 699MHz	Highpass Standard Filter Chebyshev Design 10 Section	OHP Series SMA/N connectors
---	---	--

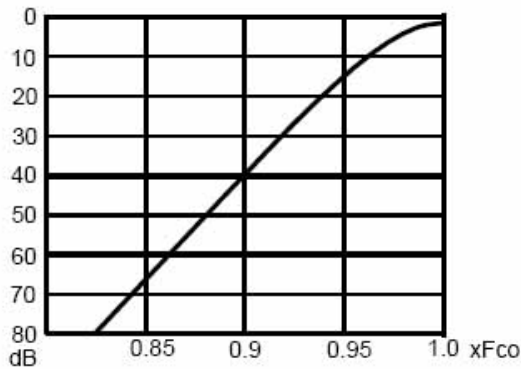

Connector Codes:**
 E (N-female) F (N-male) S (SMA-female) T (SMA-male)

Return Loss (50 Ω) in Passband:
 near Fco: 20 dB typical = VSWR 1.23 : 1 max.
 at the worst point: 14 dB min. = VSWR 1.5 : 1 max.

Model Number	Passband MHz	Max. Insertion Loss			Reject Attenuation	
		at Fco	at 1.03 x Fco	at 1.1 x Fco	40 dB min. at 0.52 x Fco =	60 dB min. from DC to 0.39 x Fco =
OHP 150-10	150 to 2000	0.35 dB	0.32 dB	0.31dB	78M Hz	DC to 58.5 M H z
OHP 160-10	160 to 2000	0.35 dB	0.32 dB	0.31dB	83.2 M Hz	DC to 62.4 M H z
OHP 170-10	170 to 2000	0.35 dB	0.32 dB	0.31dB	88.4 M Hz	DC to 66.3 M H z
OHP 185-10	185 to 2000	0.31 dB	0.30 dB	0.29dB	96.2 M Hz	DC to 72.2 M H z
OHP 200-10	200 to 2000	0.31 dB	0.30 dB	0.29dB	104 M Hz	DC to 78.0 M H z
OHP 215-10	215 to 2000	0.31 dB	0.30 dB	0.29dB	112 M Hz	DC to 83.9 M H z
OHP 230-10	230 to 2000	0.31 dB	0.30 dB	0.29dB	120 M Hz	DC to 89.7 M H z
OHP 245-10	245 to 2000	0.31 dB	0.30 dB	0.29dB	127 M Hz	DC to 95.6 M H z
OHP 260-10	260 to 3000	0.31 dB	0.30 dB	0.29dB	135 M Hz	DC to 101 M H z
OHP 275-10	275 to 3000	0.31 dB	0.30 dB	0.29dB	143 M Hz	DC to 107 M H z
OHP 300-10	300 to 3000	0.31 dB	0.30 dB	0.29dB	156 M Hz	DC to 117 M H z
OHP 325-10	325 to 3000	0.31 dB	0.30 dB	0.29dB	169 M Hz	DC to 127 M H z
OHP 350-10	350 to 3000	0.31 dB	0.30 dB	0.29dB	182 M Hz	DC to 137 M H z
OHP 375-10	375 to 3000	0.31 dB	0.30 dB	0.29dB	195 M Hz	DC to 146 M H z
OHP 400-10	400 to 3000	0.31 dB	0.30 dB	0.29dB	208 M Hz	DC to 156 M H z
OHP 425-10	425 to 3000	0.31 dB	0.30 dB	0.29dB	221 M Hz	DC to 166 M H z
OHP 450-10	450 to 3000	0.31 dB	0.30 dB	0.29dB	234 M Hz	DC to 176 M H z
OHP 500-10	500 to 3000	0.34 dB	0.32 dB	0.31dB	260 M Hz	DC to 195 M H z
OHP 550-10	550 to 3000	0.34 dB	0.32 dB	0.31dB	286 M Hz	DC to 215 M H z
OHP 600-10	600 to 3000	0.34 dB	0.32 dB	0.31dB	312 M Hz	DC to 234 M H z
OHP 650-10	650 to 3000	0.34 dB	0.32 dB	0.31dB	338 M Hz	DC to 254 M H z