


## Passband Cavity Filter

Model: OBP-880/915-865/930-50-9

Custom:

Date: 2010-6-10

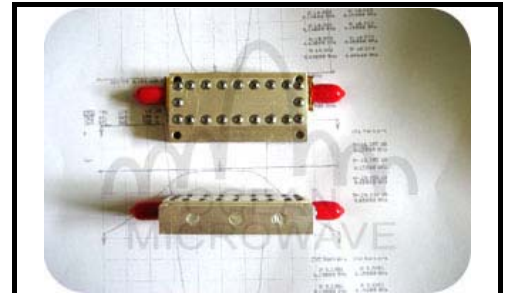

### Performance parameters

序号	Specification	
1	Passband	880 to 915MHz
2	Passband Loss at Fo	1.5dB max at 897.5MHz
	Passband Loss at Corners	1.8dB max at 880 and 915MHz
3	Power Handling	100W max.
4	Return Loss(50Ω) in Passband	14dB min=VSWR1.5:1
5	Reject Bands	DC to 865MHz and 930 to 2500MHz
6	Reject Attenuation	50dB min

### Dimensions and approx.Weight

(The figure is reference only, the actual product may be slightly modify)

L(mm)×W(mm)×H(mm)	95×30×280 (Including screw;Excluding connector)
Mounting Provision	4×M4 threaded holes each on all sides
Approx.Weight	1.2kg(2.7lbs)



Approx. weight: 1.2 kg (2.7 lbs.)

- Slopes: 15 MHz / 50 dB
- Reiect Band to 2500 MHz

### Environmental adaptability

1	Operation Temperature	+15°C~+40°C
---	-----------------------	-------------