


Passband Cavity Filter

Model: OBP-1920/1930-1900/1950-40-4

Custom:

Date: 2010-6-10

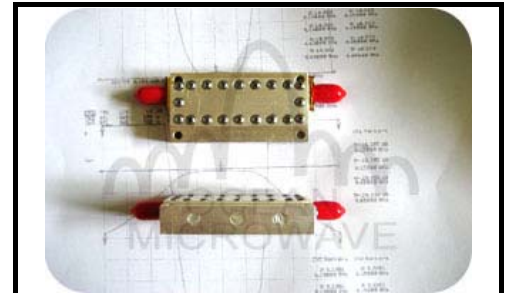


Performance parameters

序号	Specification	
1	Passband	1920 to 1930MHz
2	Passband Loss	1.5dB max.
3	Power Handling	25W max.
4	Return Loss(50Ω) in Passband	14dB min=VSWR1.5:1
5	Reject Bands	DC to 1900MHz and 1950 to 5400MHz
6	Reject Attenuation	40dB min

Dimensions and approx.Weight

(The figure is reference only, the actual product may be slightly modify)

L(mm)×W(mm)×H(mm)	60×30×115 (Including screw;Excluding connector)
Mounting Provision	4×M4 threaded holes each on all sides
Approx.Weight	0.4kg(0.9lbs)

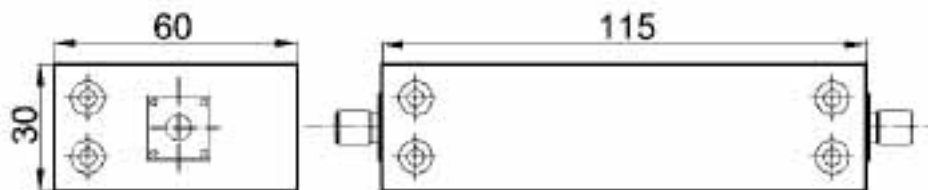

Approx. weight: 0.4 kg (0.9 lbs.)

- Slopes: 20 MHz / 40 dB
- Reject Band to 5400 MHz

Environmental adaptability

1	Operation Temperature	+15°C~+40°C
---	-----------------------	-------------