


## Passband Cavity Filter

Model: OBP-1930/1990-1910/2010-50-10

Custom:

Date: 2010-6-10

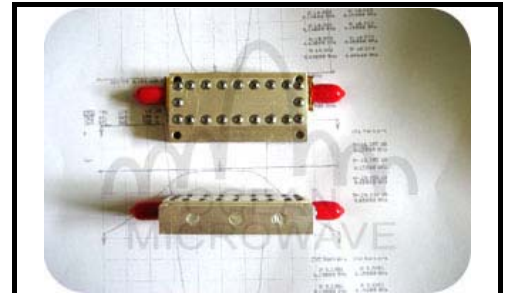


### Performance parameters

序号	Specification	
1	Passband	1930 to 1990MHz
2	Passband Loss at Fo	1.0dB max. at 1960MHz
3	Passband Loss at Corners	1.5dB max. at 1930 and 1990MHz
4	Power Handling	100W max.
5	Return Loss(50Ω) in Passband	14dB min=VSWR1.5:1
6	Reject Bands	DC to 1910MHz and 2010 to 4000MHz
7	Reject Attenuation	50dB min

### Dimensions and approx.Weight

(The figure is reference only, the actual product may be slightly modify)

L(mm)×W(mm)×H(mm)	60×30×265 (Including screw;Excluding connector)
Mounting Provision	4×M4 threaded holes each on all sides
Approx.Weight	1.1kg(2.4lbs)

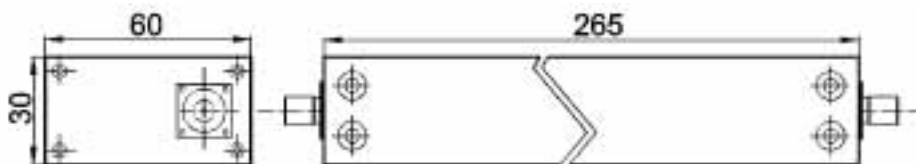

Approx. weight: 1.1 kg (2.4 lbs.)

- Slopes: 20 MHz / 50 dB
- Reject Band to 4000 MHz

### Environmental adaptability

1	Operation Temperature	+15°C~+40°C
---	-----------------------	-------------