


## Passband Cavity Filter

Model: OBP-2010/2025-1990/2045-40-6

Custom:

Date: 2010-6-10

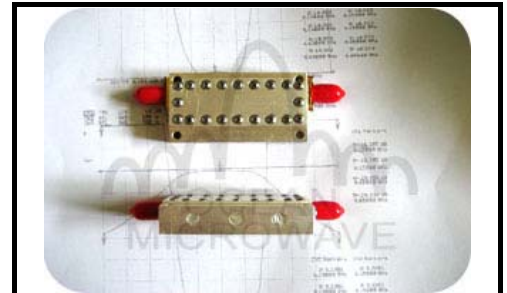


### Performance parameters

序号	Specification	
1	Passband	2010 to 2025MHz
2	Passband Loss at Fo	1.6dB max. at 2017.5MHz
3	Passband Loss at Corners	2.0dB max. at 2010 and 2025MHz
4	Power Handling	50W max.
5	Return Loss(50Ω) in Passband	14dB min=VSWR1.5:1
6	Reject Bands	DC to 1900MHz and 2045 to 4000MHz
7	Reject Attenuation	40dB min

### Dimensions and approx.Weight

(The figure is reference only, the actual product may be slightly modify)

L(mm)×W(mm)×H(mm)	60×30×165 (Including screw;Excluding connector)
Mounting Provision	4×M4 threaded holes each on all sides
Approx.Weight	0.6kg(1.3lbs)

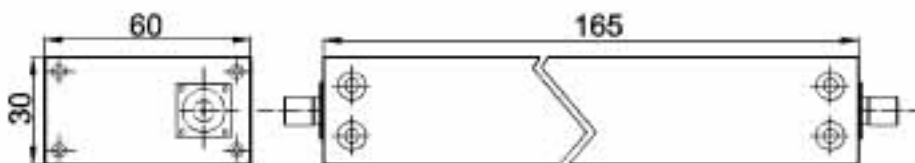

Approx. weight: 0.6 kg (1.3 lbs.)

- Slopes: 20 MHz / 40 dB
- Reject Band to 4000 MHz

### Environmental adaptability

1	Operation Temperature	+15°C~+40°C
---	-----------------------	-------------