


Passband Cavity Filter

Model: OBP-2110/2170-2080/2200-50-9

Custom:

Date: 2010-6-10

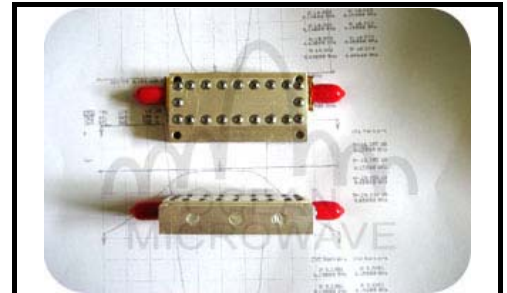


Performance parameters

序号	Specification	
1	Passband	2110 to 2170MHz
2	Passband Loss at Fo	1.0dB max. at 2140MHz
3	Passband Loss at Corners	1.7dB max. at 2110 and 2170MHz
4	Power Handling	100W max.
5	Return Loss(50Ω) in Passband	14dB min=VSWR1.5:1
6	Reject Bands	DC to 2080MHz and 2200 to 4000MHz
7	Reject Attenuation	50dB min

Dimensions and approx.Weight

(The figure is reference only, the actual product may be slightly modify)

L(mm)×W(mm)×H(mm)	60×30×240 (Including screw;Excluding connector)
Mounting Provision	4×M4 threaded holes each on all sides
Approx.Weight	1.0kg(2.2lbs)

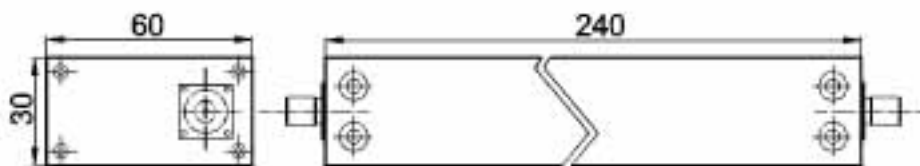

Approx. weight: 1.0 kg (2.2 lbs.)

- Slopes: 30 MHz / 50 dB
- Reject Band to 4000 MHz

Environmental adaptability

1	Operation Temperature	+15°C~+40°C
---	-----------------------	-------------