


Passband Cavity Filter

Model: OBP-2402/2480-2350/2532-70-10

Custom:

Date: 2010-6-10

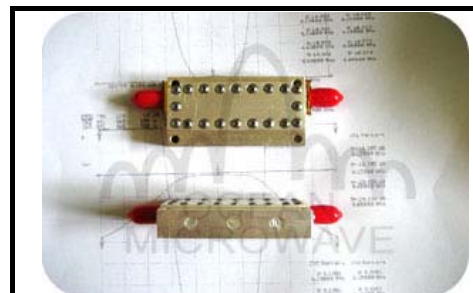


Performance parameters

序号	Specification	
1	Passband	2402 to 2480MHz
2	Passband Loss at Fo	1.6dB max. at 2441MHz
3	Passband Loss at Corners	2.0dB max. at 2402 and 2480MHz
4	Power Handling	100W max.
5	Return Loss(50Ω) in Passband	14dB min=VSWR1.5:1
6	Reject Bands	DC to 2350MHz and 2532 to 5500MHz
7	Reject Attenuation	70dB min

Dimensions and approx.Weight

(The figure is reference only, the actual product may be slightly modify)

L(mm)×W(mm)×H(mm)	45×20×200 (Including screw;Excluding connector)
Mounting Provision	4×M4 threaded holes each on all sides
Approx.Weight	0.46kg(1.0lbs)

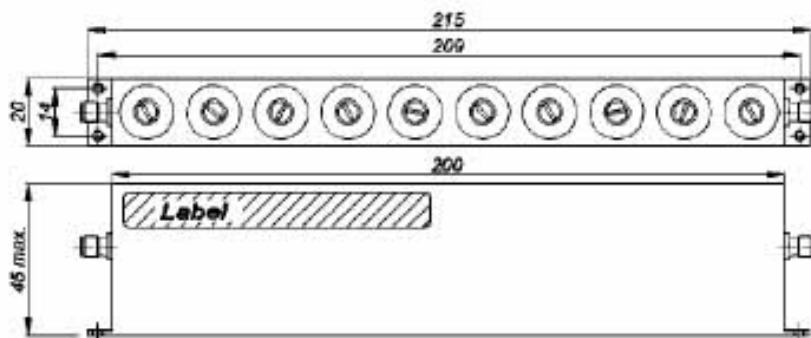

- Slopes: 52 MHz / 70 dB
- Reject Band to 5500 MHz

Environmental adaptability

1	Operation Temperature	+15℃~+40℃
---	-----------------------	-----------