

Passband Cavity Filter

Model: OBP-2400/2483.5-2346/2537-60-10

Custom:

Date: 2010-6-10




Performance parameters

序号	Specification	
1	Passband	2400 to 2483.5MHz
2	Passband Loss at Fo	1.6dB max. at 2441.75MHz
3	Passband Loss at Corners	2.0dB max. at 2400 and 2483.5MHz
4	Power Handling	100W max.
5	Return Loss(50Ω) in Passband	14dB min=VSWR1.5:1
6	Reject Bands	DC to 2346MHz and 2537 to 6000MHz
7	Reject Attenuation	60dB min

Dimensions and approx.Weight

(The figure is reference only, the actual product may be slightly modify)

L(mm)×W(mm)×H(mm)	60×30×265 (Including screw;Excluding connector)
Mounting Provision	4×M4 threaded holes each on all sides
Approx.Weight	0.75kg(1.65lbs)

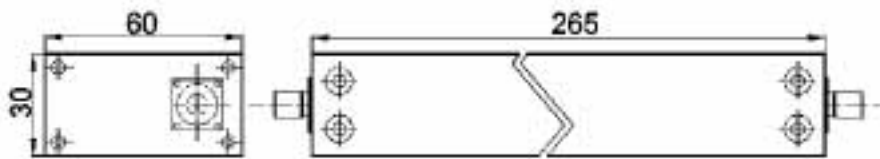

Approx. weight: 0.75 kg (1.65 lbs.)

- Slopes: 54 / 53.5 MHz / 60 dB
- Reject Band to 6000 MHz

Environmental adaptability

1	Operation Temperature	+15°C~+40°C
---	-----------------------	-------------