

# 功分器/合路器

2 Way-0° 50Ω 800 to 2200 Mhz OPD800-2200-2-S

### 性能

- 宽带宽, 800 to 2200 MHz.
- 良好的隔离, 25 dB typ.
- 良好的幅度平衡, 0.01 dB typ.
- 良好的相位平衡, 1 deg. typ.
- 尺寸小
- 低成本

### 应用

- PCN
- GPS
- 防御
- 通讯
- DCS
- GSM
- cellular
- WCDMA





### 最大额定值

工作温度	-40° C to 85° C
储存温度	-55° C to 100° C
输入功率	10W max.
内部损耗	0.75W max.

P如果超出这些限制可能造成永久性损害.



技术性能指标			
1	频率	800-2200MHz	
2	插入损耗 (最大)	0.8-1.5dB	ABOVE 3 dB
3	隔离 (最小)	17dB	24 dB Max.
4	相位平衡 (最大)	4.0°	
5	幅度平衡 (最大)	0.2dB	
6	驻波比 (最大)	1.34:1	
7	最大功率	2watt	
8	接头形式	SMA/BNC/N	
9	阻抗	50 Ohm	

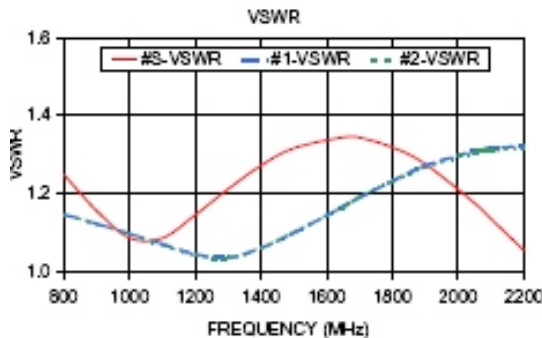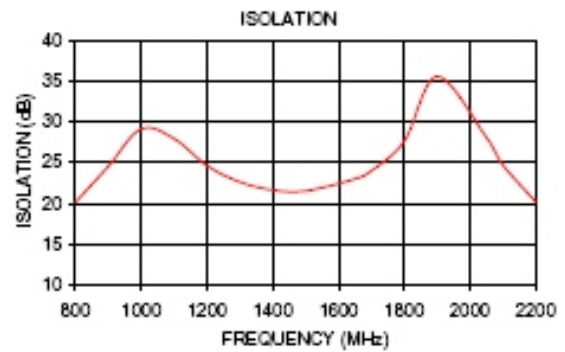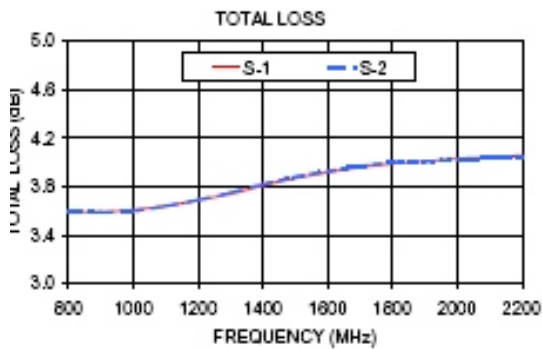

Outline Drawing



OCEANMICROWAVE

Tel: +86-10-60290088 Fax: +86-10-60290088-601

Web: <http://www.oceanmicrowave.com> Email: [sales@oceanmicrowave.com](mailto:sales@oceanmicrowave.com)