




中心频率
35 ~ 149MHz

高通滤波器
切比雪夫
10阶

OHP系列
SMA/N 连接器

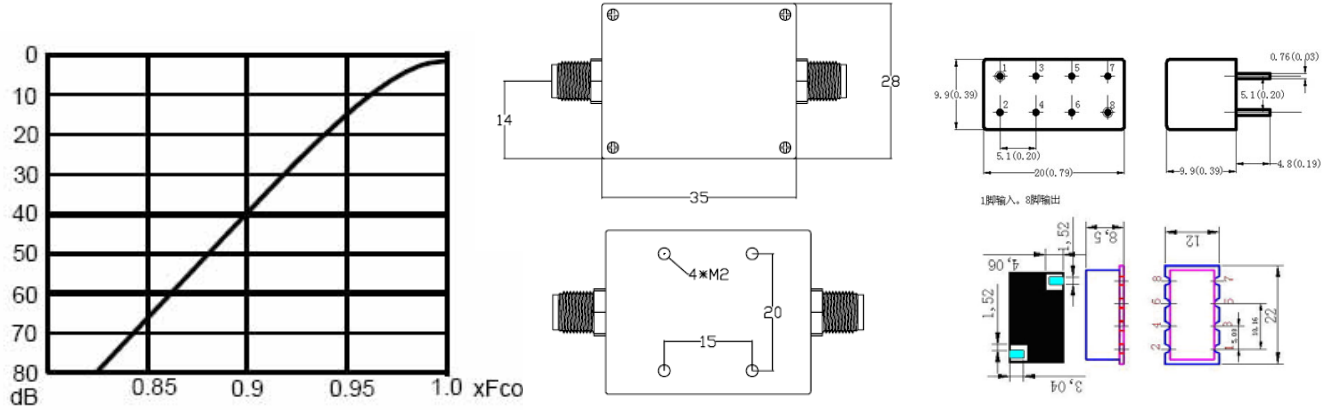

型号	通频带	最大插损			抑制衰减	
	MHz	at Fco	at 1.03 x Fco	at 1.1 x Fco	40 dB min. at 0.9 x Fco =	60 dB min. from DC to 0.86 x Fco =
OHP 35-10	35 to 650	3.80 dB	2.43 dB	1.68 dB	31.5 MHz	DC to 30.1 MHz
OHP 40-10	40 to 650	3.55 dB	2.25 dB	1.55 dB	36 MHz	DC to 34.4 MHz
OHP 45-10	45 to 650	3.27 dB	2.06 dB	1.43 dB	40.5 MHz	DC to 38.7 MHz
OHP 50-10	50 to 800	2.96 dB	1.87 dB	1.30 dB	45 MHz	DC to 43 MHz
OHP 55-10	55 to 800	2.96 dB	1.87 dB	1.30 dB	49.5 MHz	DC to 47.3 MHz
OHP 60-10	60 to 800	2.87 dB	1.80 dB	1.26 dB	54 MHz	DC to 51.6 MHz
OHP 65-10	65 to 800	2.87 dB	1.80 dB	1.26 dB	58.5 MHz	DC to 55.9 MHz
OHP 70-10	70 to 1000	2.85 dB	1.73 dB	1.21 dB	63 MHz	DC to 60.2 MHz
OHP 75-10	75 to 1000	2.66 dB	1.64 dB	1.16 dB	67.5 MHz	DC to 64.5 MHz
OHP 80-10	80 to 1250	2.57 dB	1.56 dB	1.10 dB	72 MHz	DC to 68.8 MHz
OHP 90-10	90 to 1250	2.47 dB	1.48 dB	1.06 dB	81 MHz	DC to 77.4 MHz
OHP 100-10	100 to 1500	2.37 dB	1.40 dB	1.02 dB	90 MHz	DC to 86 MHz
OHP 110-10	110 to 1500	2.37 dB	1.40 dB	1.02 dB	99 MHz	DC to 94.6 MHz
OHP 120-10	120 to 1500	2.14 dB	1.35 dB	1.00 dB	108 MHz	DC to 103 MHz
OHP 130-10	130 to 1500	2.14 dB	1.35 dB	1.00 dB	117 MHz	DC to 112 MHz
OHP 140-10	140 to 1500	1.90 dB	1.30 dB	0.98 dB	126 MHz	DC to 120 MHz